




Low frequency



- very flexible and bendable cable for non-stationary electrical loads
- connection of lamps, monitors, computers, printers, copiers, mobile devices and much more
- plastic-coated aluminium strip, two-wire copper min. 0.34 mm²
- shield (alternating electric field, 50 Hz mains voltage)
- reduction of the alternating magnetic field through twisting
- protection class 1 - with PE protective ground conductor
- shielded flexible cable for connecting movable devices.

Please note that the shielding wire may only be connected on one side. See diagram.

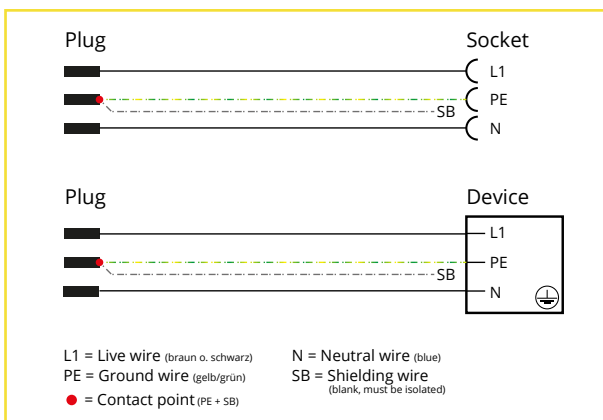

Flexible cable

(H)05VV-F3G 0,75 mm²

Technical data

| | |
|--|---|
| length: | cut goods by metre roll 50 metre |
| colour: | white |
| number of cores:: | 3 + shield wire fine wire |
| cross-section: | 0,75 mm ² |
| rated voltage: | max. 250 V / 50 Hz |
| current load according to IEC 320-1: | 6 A |
| outer diameter: | Ø 6,6 mm |
| protection class: | 1 (with ground wire) |
| reduction of alternating magnetic field MWF-beat rate: | beat 15 (single cores twisted 15 times per metre) |
| isolation: | polyvinyl chloride |
| shielding: | plastic-coated aluminium strip, double wire, fine copper wire min. 0.34 mm ² |
| auditing: | TCO'99 (MPR II, DIN EN 50279) limit values clearly undercut by all measurement methods |


Scope of application

very flexible and bendable cable for non-fixed electrical consumers

connecting lamps, monitors, computers, printers, copiers and other movable equipment

Scope of delivery

flexible cable
(H)05VV-F3G 0,75 mm² roll or cut goods by metre

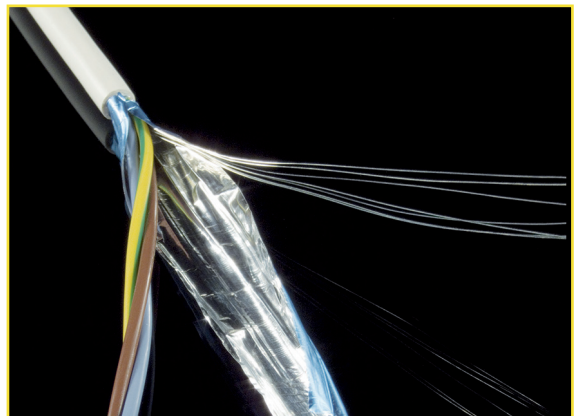

Order-No.: 300618 Roll - 41-3043

Short-Desc.: (H)05VV-3 x 0,75 (R)

Order-No.: 300020 Metre - 41-3043

Short-Desc.: (H)05VV-3 x 0,75 (M)